

Brand-Rex Air Blown Fibre - Blolite


Blolite External MultiDucts

Product Data

	Diameter mm	Weight kg / km	Max Tensile Load N	Min Static Bend mm
1w 5mm (LSHF) - O	7.5	38	380	40
2w 5mm (LSHF) - O	7.5 x 13.0	98	630	60
4w 5mm (LSHF) - O	15.2	139	900	180
7w 5mm (LSHF) - O	18.6	200	1250	250
12w 5mm (LSHF) - O	24.0	307	1800	310
19w 5mm (LSHF) - O	29.6	433	2600	370
1w 8mm (LSHF) - O	10.5	68	450	80
2w 8mm (LSHF) - O	10.5 x 19.0	169	800	95
4w 8mm (LSHF) - O	23.0	252	1250	280
7w 8mm (LSHF) - O	27.6	375	1750	380
12w 8mm (LSHF) - O	36.0	588	2000	540

Product Part Numbering

	5.00mm	8.00mm
1 Way MultiDuct	21-0101-02	21-0104-02
2 Way MultiDuct	21-0201-02	21-0204-02
4 Way MultiDuct	21-0401-02	21-0404-02
7 Way MultiDuct	21-0701-02	21-0704-02
12 Way MultiDuct	21-1201-02	21-1204-02
19 Way MultiDuct	21-1901-02	n/a

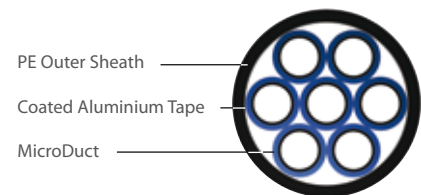

Available with 5mm or 8mm MicroDucts

Aluminium Moisture Barrier

MicroDuct Numbered for Identification

PRODUCT DESCRIPTION:

To facilitate the installation of Blolite single blown fibres a range of multi-way MicroDucts into which Blolite fibres can be blown are available. The external range of these MultiDucts are constructed with the standard Blolite MicroDuct surrounded with a layer of coated aluminium tape and a Polyethylene outer sheath making them suitable for external applications.

PRODUCT PERFORMANCE:

Temp - Operation: -20°C to +60°C

Temp - Storage: -40°C to +80°C

Temp - Installation: -10°C to +70°C