


Brand-Rex Optical Cables - Universal MTU 01 and External MTE 01
Burial Steel Tape Armoured Multi Loose Tube Cable

Product Data

	Diameter mm	Weight (U)/(E) kg / km	Max Tensile Load N	Min Static Bend mm	Min Dynamic Bend mm
4 - 24 Fibre	14.10	247/198	1500	145	215

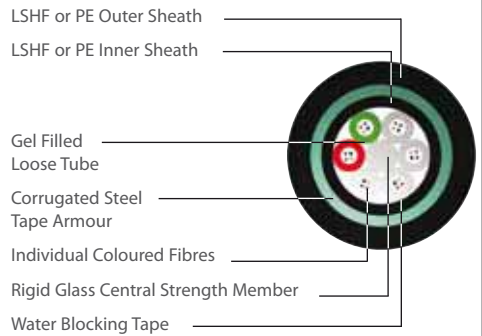

Corrugated Steel Tape Armour

Rigid Glass Central Strength Member

Choice of Universal or External Sheath

6 x 4 Fibres Per Tube Offering up to 24 Fibres

2.10mm Gel filled Loose Tube

PRODUCT DESCRIPTION:

For applications where a higher tensile load is required versus that offered by unitube constructions, the universal product range offers a compact low fibre count direct burial grade cable. The product range consists of multiple 2.10mm loose tubes containing up to 4 fibres and solid fillers where required, stranded around a rigid glass non metallic central strength member. A layer of water blocking tape provides interstitial water blocking and the LSHF or PE inner sheath and a layer of corrugated steel tape armour provide additional crush resistance.

PRODUCT PERFORMANCE:

Crush (N): 7500	Temp - Operation: -40°C to +70°C
Impact (Nm): 30	Temp - Storage: -40°C to +70°C
Torsion (turns / m): 5	Temp - Installation: -10°C to +70°C
Fire: IEC 60332-1 (MSU2 only)	Water Penetration: <3m @ 24h

Tested in accordance with IEC 60794-1-2 unless stated

Product Part Numbering - MTU 01 - Universal

	62.5/125	50/125	OM3	8/125
4 Fibre	HF 062 S4 W L STA LU 4FT	HF 050 S4 W L STA LU 4FT	HF OM3 S4 W L STA LU 4FT	HF 008 S4 W L STA LU 4FT
8 Fibre	HF 062 S8 W L STA LU 4FT	HF 050 S8 W L STA LU 4FT	HF OM3 S8 W L STA LU 4FT	HF 008 S8 W L STA LU 4FT
12 Fibre	HF 062 S12 W L STA LU 4FT	HF 050 S12 W L STA LU 4FT	HF OM3 S12 W L STA LU 4FT	HF 008 S12 W L STA LU 4FT
16 Fibre	HF 062 S16 W L STA LU 4FT	HF 050 S16 W L STA LU 4FT	HF OM3 S16 W L STA LU 4FT	HF 008 S16 W L STA LU 4FT
20 Fibre	HF 062 S20 W L STA LU 4FT	HF 050 S20 W L STA LU 4FT	HF OM3 S20 W L STA LU 4FT	HF 008 S20 W L STA LU 4FT
24 Fibre	HF 062 S24 W L STA LU 4FT	HF 050 S24 W L STA LU 4FT	HF OM3 S24 W L STA LU 4FT	HF 008 S24 W L STA LU 4FT

Product Part Numbering - MTE 01 - External

	62.5/125	50/125	OM3	8/125
4 Fibre	HF 062 S4 W NM STA NM 4FT	HF 050 S4 W NM STA NM 4FT	HF OM3 S4 W NM STA NM 4FT	HF 008 S4 W NM STA NM 4FT
8 Fibre	HF 062 S8 W NM STA NM 4FT	HF 050 S8 W NM STA NM 4FT	HF OM3 S8 W NM STA NM 4FT	HF 008 S8 W NM STA NM 4FT
12 Fibre	HF 062 S12 W NM STA NM 4FT	HF 050 S12 W NM STA NM 4FT	HF OM3 S12 W NM STA NM 4FT	HF 008 S12 W NM STA NM 4FT
16 Fibre	HF 062 S16 W NM STA NM 4FT	HF 050 S16 W NM STA NM 4FT	HF OM3 S16 W NM STA NM 4FT	HF 008 S16 W NM STA NM 4FT
20 Fibre	HF 062 S20 W NM STA NM 4FT	HF 050 S20 W NM STA NM 4FT	HF OM3 S20 W NM STA NM 4FT	HF 008 S20 W NM STA NM 4FT
24 Fibre	HF 062 S24 W NM STA NM 4FT	HF 050 S24 W NM STA NM 4FT	HF OM3 S24 W NM STA NM 4FT	HF 008 S24 W NM STA NM 4FT

Fibre Selection Codes

062 050 H50 OM3 OM4 BM3 BM4 008 108 208

Use these part number identifiers to select the fibre type you require by replacing the fibre code in the part number e.g. HFOM3PDC24LU becomes HFBM3PDC24LU.