

**Brand-Rex Copper Connectivity – Cat6Plus Panels**  
 Category 6 Half U 24 Port Patch Panel

Lighter & narrower than conventional patch panels

Ideal for server cabinets where space is a factor

Ideal for small projects with space restrictions

Suitable for the small telecom enclosure approach

- High density (48 ports in 1U space)
- Integral cable management
- Compatible with all standard 19" racks and cabinets.
- Individual port identification
- Available in shielded and unshielded versions

**PRODUCT DESCRIPTION:**


The Cat6Plus 19" rack mounted 1/2U 24 Port Shielded and Unshielded patch panels offer a port density which delivers 48 terminations in a single U height with true Category 6 component performance using a patented contact pin array design. The robust and easy to install patch panel employs a conventional termination method that affords the installer the maximum punch down accessibility for wire termination.

To assure the optimum link performance the panel has been designed with integral rear cable management which provides easy routing and strain relief for the high performance cabling. The shielded version of the 1/2U patch panel introduces shielded mounting clips to assure optimum earthing of the cable screens.


**PRODUCT CHARACTERISTICS**

- Panel Width: 19" (483mm)
- Panel Height: 1/2 U (22mm)
- Panel Depth: 105mm
- Outlet Style: Unkeyed RJ-45
- Outlets: 24 ports
- Colour: RAL 9005 Black or RAL 7035 Grey
- Punch Down Blocks: LSA style IDC
- Wiring Standard: EIA/TIA 568A EIA/TIA 568B
- Conformance: Category 6 ANSI/EIA/TIA 568-B.2-1

Shielded

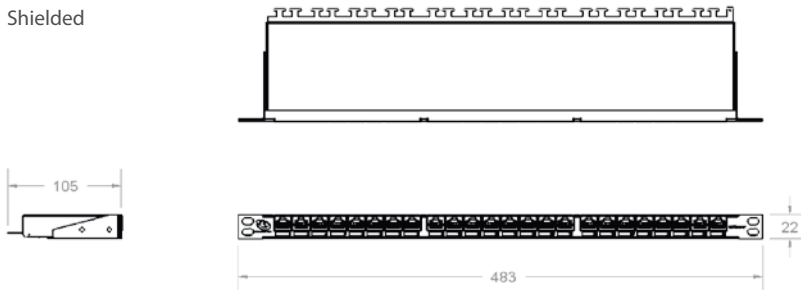

Unshielded

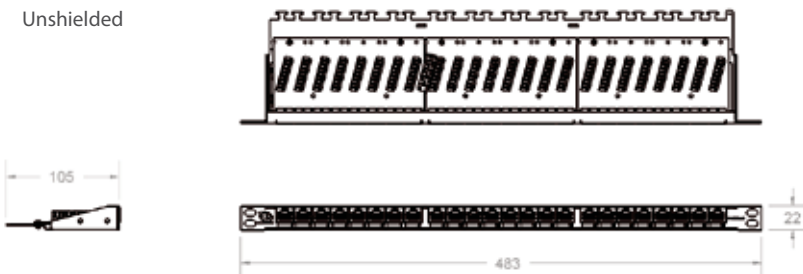

**Product Part Numbering**

Description	Product Part Number	Colour
Cat6Plus 1/2 U 24 Port Unshielded Panel	C6CPNLU240K2H	Black
Cat6Plus 1/2 U 24 Port Unshielded Panel	C6CPNLU240K8H	Grey
Cat6Plus 1/2 U 24 Port Shielded Panel	C6CPNLF240K2H	Black
Cat6Plus 1/2 U 24 Port Shielded Panel	C6CPNLF240K8H	Grey